

## LAMB ELECTRIC


**Model: 119654-00**

### DESCRIPTION

- One stage
- 230 volts
- 5.7"/145 mm diameter
- Double ball bearings
- Single speed
- Thru-flow discharge
- Thermoset fan end bracket
- Aluminum commutator bracket

### DESIGN APPLICATION

- Equipment operating in environments not requiring separation of working air from motor ventilating air
- Designed to handle clean, dry, filtered air only

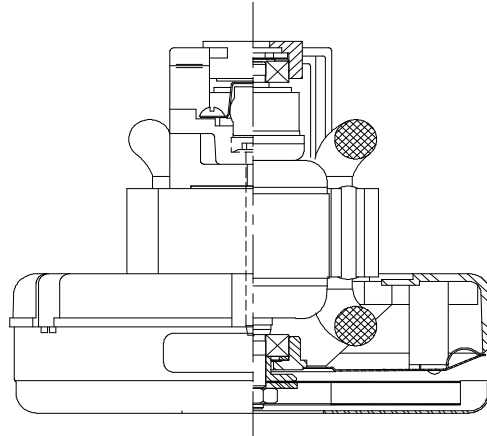


### SPECIAL FEATURES

- Suitable for 230 volt AC operation, 50/60 Hz
- UL recognized, category PRGY2 (E47185)
- No shaft extension
- Provision for grounding
- Skeleton-frame design
- The Lamb Electric vacuum motor line offers a wide range of performance levels to meet design needs

### TYPICAL MOTOR PERFORMANCE.\*


(At 230 volts, 50Hz, test data is corrected to standard conditions of 29.92 Hg, 68° F.)

ASTM DATA

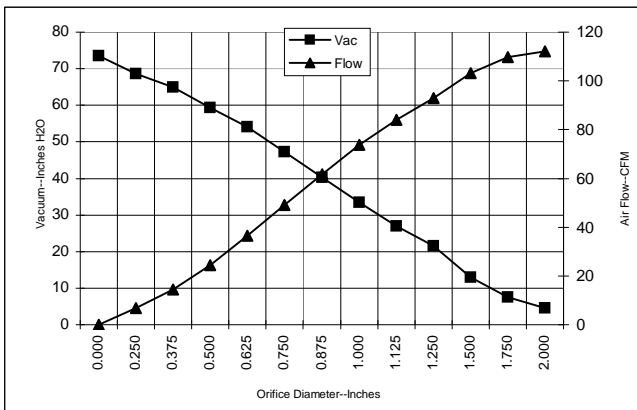

| Orifice (Inches) | Amps | Watts (In) | RPM   | Vac (In. H <sub>2</sub> O) | Flow (CFM) | Air Watts |
|------------------|------|------------|-------|----------------------------|------------|-----------|
| 2.000            | 5.0  | 1084       | 23640 | 4.6                        | 112.0      | 61        |
| 1.750            | 5.1  | 1093       | 23540 | 7.6                        | 109.8      | 98        |
| 1.500            | 5.1  | 1098       | 23540 | 12.9                       | 103.3      | 156       |
| 1.250            | 5.0  | 1090       | 23540 | 21.5                       | 92.9       | 235       |
| 1.125            | 5.0  | 1077       | 23740 | 26.9                       | 84.1       | 266       |
| 1.000            | 4.8  | 1047       | 24140 | 33.4                       | 73.7       | 289       |
| 0.875            | 4.6  | 1007       | 24540 | 40.2                       | 61.8       | 292       |
| 0.750            | 4.4  | 954        | 25140 | 47.2                       | 49.1       | 272       |
| 0.625            | 4.1  | 902        | 26130 | 54.1                       | 36.4       | 231       |
| 0.500            | 3.8  | 842        | 26830 | 59.3                       | 24.3       | 169       |
| 0.375            | 3.6  | 785        | 27930 | 64.9                       | 14.5       | 111       |
| 0.250            | 3.3  | 739        | 29030 | 68.6                       | 6.9        | 56        |
| 0.000            | 3.1  | 697        | 29920 | 73.6                       | 0.0        | 0         |

METRIC DATA

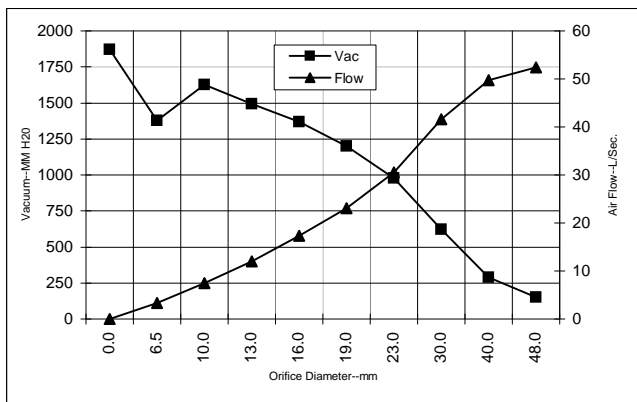

| Orifice (mm) | Amps | Watts (In) | RPM   | Vac (mm H <sub>2</sub> O) | Flow (L/Sec) | Air Watts |
|--------------|------|------------|-------|---------------------------|--------------|-----------|
| 48.0         | 5.0  | 1088       | 23596 | 150                       | 52.4         | 77        |
| 40.0         | 5.1  | 1097       | 23540 | 287                       | 49.7         | 139       |
| 30.0         | 5.0  | 1083       | 23650 | 622                       | 41.6         | 252       |
| 23.0         | 4.7  | 1017       | 24440 | 978                       | 30.6         | 291       |
| 19.0         | 4.4  | 953        | 25160 | 1202                      | 23.1         | 271       |
| 16.0         | 4.1  | 904        | 26090 | 1367                      | 17.4         | 233       |
| 13.0         | 3.9  | 848        | 26760 | 1493                      | 12.0         | 175       |
| 10.0         | 3.6  | 794        | 27765 | 1627                      | 7.5          | 120       |
| 6.5          | 3.3  | 741        | 28975 | 1378                      | 3.4          | 59        |
| 0.0          | 3.1  | 697        | 29920 | 1869                      | 0.0          | 0         |

Note: Metric performance data is calculated from the ASTM data above.


\* Data represents performance of a typical motor sampled from a large production quantity. Individual motor data may vary due to normal manufacturing variations.

|             |           |                        |       |          |       |                 |       |                |      |
|-------------|-----------|------------------------|-------|----------|-------|-----------------|-------|----------------|------|
| Test Specs: | 230 volts | Minimum Sealed Vacuum: | 64.0" | ORIFICE: | 7/8 " | Minimum Vacuum: | 36.0" | Maximum Watts: | 1035 |
|-------------|-----------|------------------------|-------|----------|-------|-----------------|-------|----------------|------|

**DIMENSIONS**

**NOTES:**

1. LEADS: 18GA STRANDED. LEADS CAN BE ANY COLOR EXCEPT GREEN OR GREEN WITH YELLOW STRIPE.
2. GROUNDING OR EARTHING PROVISIONS: USE HOLES AS INDICATED FOR GROUNDING OR EARTHING. REFER TO APPROPRIATE LISTING OR REGULATORY AGENCY FOR PROPER METHOD OF GROUNDING OR EARTHING.
3. RECOMMENDED SCREW SIZE 10-16 TYPE BT OR 25 THREAD CUTTING SCREW. MAXIMUM PENETRATION [17.40]/.685.
4. MOTOR IDENTIFICATION: MANUFACTURER'S NAME, MODEL NUMBER, VOLTAGE, FREQUENCY, INSPECTOR'S CODE, DATE OF MANUFACTURE, AGENCY RECOGNITION CODE; PLANT LOCATION CODE AND COUNTRY OF ORIGIN
5. MOUNTING MUST NOT RESTRICT THIS DIAMETER.

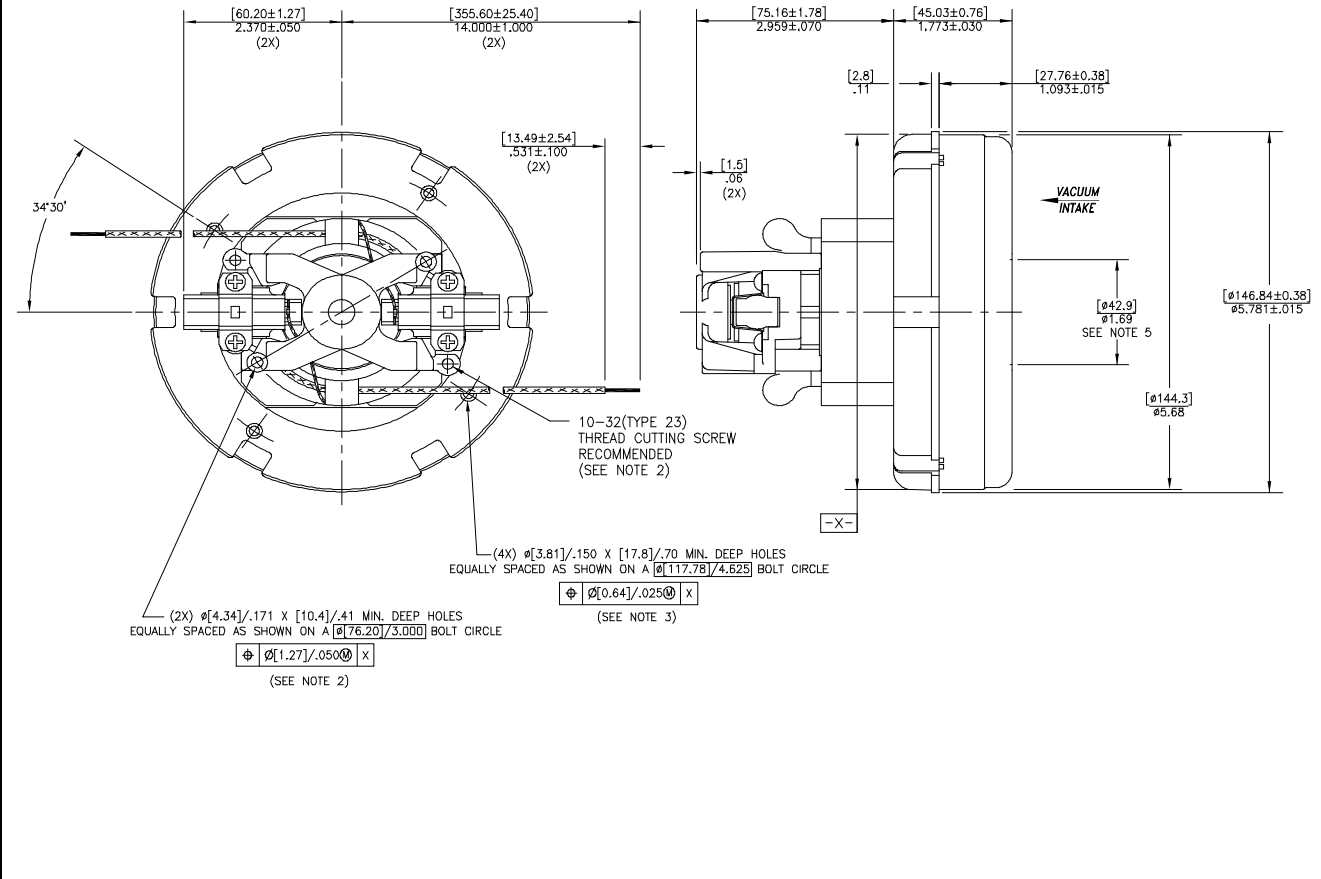

**IMPORTANT NOTE:** Pictorial and dimensional data are subject to change without notice. Contact factory for current revision levels.

**WARNING -** When using AMETEK Lamb Electric bypass motors in machines that come in contact with foam, liquid (including water), or other foreign substances, the machine must be designed and constructed to prevent those substances from reaching the fan system, motor housing, and electrical components. Lamb Electric vacuum motors other than hazardous duty models should not be applied in machines that come in contact with dry chemicals or other volatile materials. Failure to observe these precautions could cause flashing (depending on volatility) or electrical shock which could result in property damage and severe bodily injury, including death in extreme cases. All applications incorporating Lamb Electric motors should be submitted to appropriate organizations or agencies for testing specifically related to the safety of your equipment.

